3246R SCISSOR

ELECTRIC SCISSOR LIFT



Performance*

Platform Height 9.80 m Platform Capacity 320 kg Capacity on Platform Extension 120 kg Lift/Lower Time 50/37 Seconds Maximum Drive Height (Indoor Only) Full Height Weight* 2,500 kg Drive Speed-Elevated 0.8 km/h Drive Speed-Lowered 3.5 km/h Gradeability 25% Turning Radius (Inside) Zero Turning Radius (Outside) 2.4 m

Standard Specifications*

Power Source

Batteries4 x 6V 220 amp-hrCharger27 ampDriveHydraulic Front-wheel

Hydraulic System

• Capacity 15 L

• Pump Fixed Displacement Gear

Tyres

• Tyre Size/Type (Non-Marking) 406 x 127 mm

Brakes

• Multi-Disc Friction

Standard Features*

- Proportional Controls
- Battery Condition Indicator
- All Motion Alarm
- 27 amp Multi-Function Universal Charger
- Horn
- Hourmeter
- Tilt Alarm and Light
- Lanyard Attach Points
- Moveable, Removable Platform Control
- Nickel Plated Pins
- Lubrication Free Scissor Arm Bushings
- Scissor Maintenance Prop
- Self-centering Arm Stack
- Active Pothole Protection System
- Lifting and Tie Down Points

- Fork Lift Pockets
- Foot-Actuated Deck Extension
- Steel Swing-Out Doors
- Variable Tilt Visual Zone Indicator
- · Manual Descent Cable
- Diamond Tread Steel Deck
- Greaseless Kingpin Joints
- Analyzer Port for Diagnostics
- Dynamic Braking
- Flashing Amber Beacon
- Self Closing, Self Latching Gate
- MDI (Ground)
- Drive Motor Covers
- AS/NZS 1418.10 Compliance

Accessories & Options

- 220 Amp-Hour AGM Batteries
- Fire Extinguisher
- Anti-Vandalism Package for Ground Controls and Platform Controls
- Ambient Noise (Sqwuaker) Alarm
- AC Outlet To Platform incl. ELCB
- Pipe Racks

- ClearSky
- Access Control
- Mobile Control
- SkySense



^{*} Certain options or country standards will increase weight.


3246R SCISSOR

ELECTRIC SCISSOR LIFT



Dimensions

A. Platform Height–Lowered		1.30 m
B. Platform Railing Height		1.13 m
C. Overall Height	(Rails Up)	2.50 m
	(Rails lowered)	2.00 m
D. Platform Size		1.10 m x 2.10 m
E. Platform Extension		0.91 m
F. Overall Width		1.17 m
G. Overall Length		2.40 m
H. Wheelbase		1.90 m
I. Ground Clearance		0.10 m

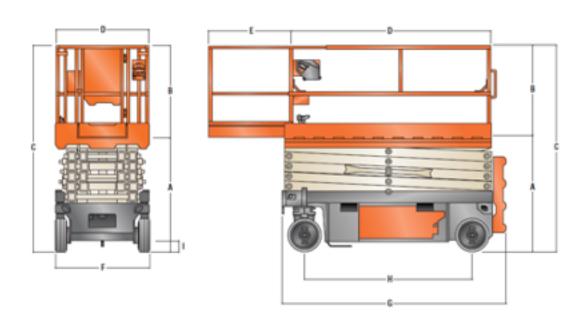

The JLG "1 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/ or equipment changes without prior notification. This machine meets or exceeds AS/NZS 1418.10 2011 as originally manufactured for intended applications.



358 Park Road Regents Park, NSW 2143 Telephone 02 8718 6300 Fax 02 8718 6377

www.jlg.com.au

An Oshkosh Corporation Company